

# ECOKRAFT DOSING SYSTEM DS25

## SUPPLY AND REGULATION OF BINDERS



### AREAS OF APPLICATION

The ECOKRAFT DS25 dosing system makes it possible to add special binder to the raw material before pelletizing. By means of a potentiometer, the quantity can be adjusted quickly and easily. The dosing system, consisting of base frame, control cabinet, vibration motor, storage container for approx. 25 kg of binder, optical warning system as well as message via SMS when a critical quantity is reached, allow a maximum of user-friendliness.


By adding binder, a significant improvement of the pellet quality can be achieved.

### ADVANTAGES


- ✓ Improvement of the pellet quality
- ✓ GSM-module
- ✓ Uncomplicated filling
- ✓ Individual dosing capability
- ✓ Mobile, compact design

### ECOKRAFT DOSING SYSTEM DS


The ECOKRAFT DS25 dosing system is a solution for adding additives to the feedstock in order to increase the pellet quality. The binder is added to the material directly on the discharge from the material container to the pellet mill. The large hopper allows easy filling of the fed raw material. Due to the compact and mobile design, the metering system can be variably placed next to the discharge.

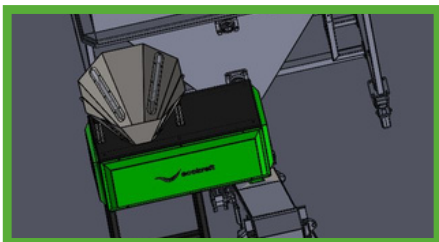

The dosing system has a large hopper, which can be used to fill the binder without any complications

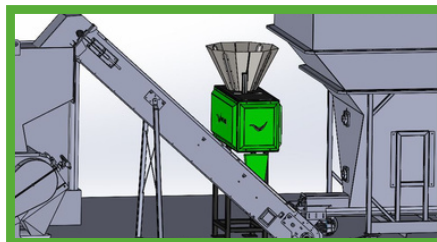

The unit is placed directly next to the conveyor belt that transports the material from the material container to the pellet mill

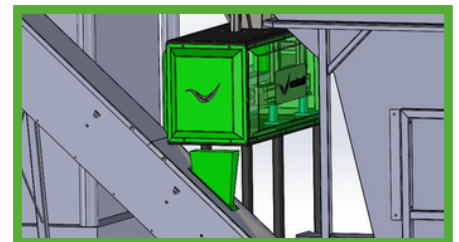

The admixture of the binder can be controlled by means of a potentiometer



## SPECIFICATIONS



### TYPE

**DS25**

<b>Weight</b>	ca. 100 kg (incl. base frame)
<b>Rated voltage</b>	230V
<b>Rated current consumption</b>	6 A
<b>Control voltage</b>	24 V

<b>Length A</b>	900 mm
<b>Width B</b>	600 mm
<b>Height C</b>	1,500 mm

